

## MATERIALS AND COLORS

### STEPS

- Solid beech wood, 40 mm thickness
- No knots or splits, maximum stability and mechanical strength thanks to Finger Joint technology
- Non-toxic water-based coating: 3 layers of paint

### HANDRAIL

- In solid beech wood in same color as the steps


### STRUCTURE

- Steel modular elements
- Powder coated with matt scratch proof finish


### RAILING (two models)

- Steel vertical columns painted in the same color as the structure (distance between the columns less than 10 cm)
- Painted steel uprights in same color as structure and satin finish horizontal stainless steel cables

### Wood colors (steps and handrail)

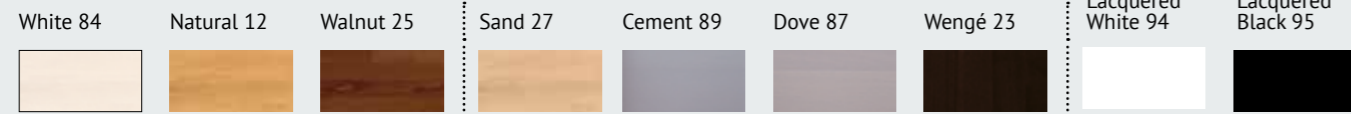

### Steel colors (structure and railing)

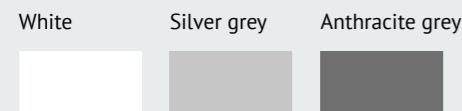


## CONFIGURATIONS

### STRAIGHT

### WITH 1 TURN

### WITH 2 TURNS

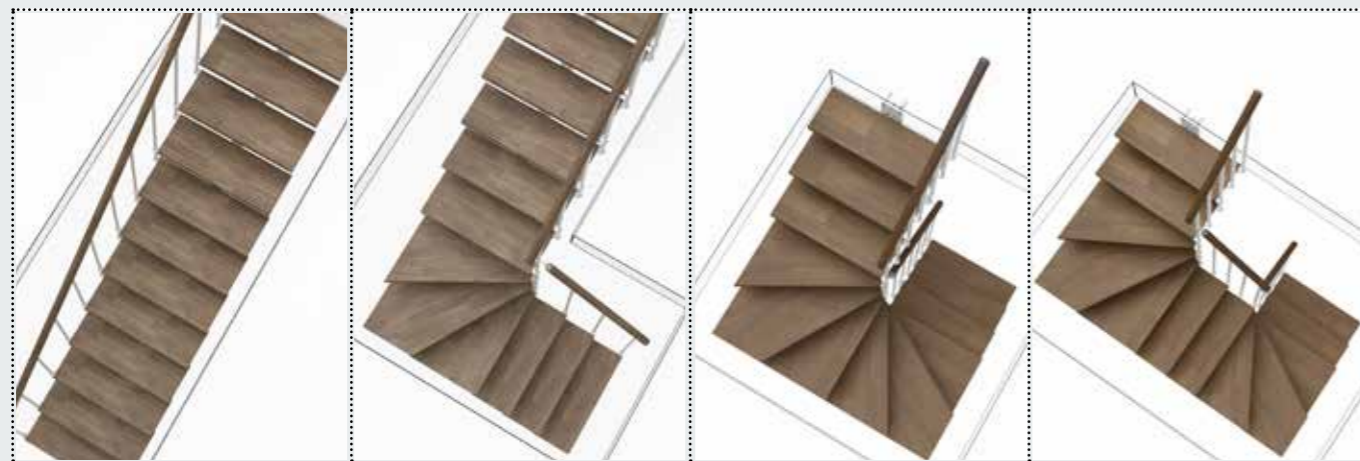

## PACKAGE

1 box

=

**1 complete staircase with 12 steps**

Structure, Steps, Railing (Internal side), Handrail

Choose between:

**Straight staircase:**


12 straight steps

**Staircase with 1 turn:**

9 straight steps + 3 winder steps

**Staircase with 2 turns:**

6 straight steps + 6 winder steps

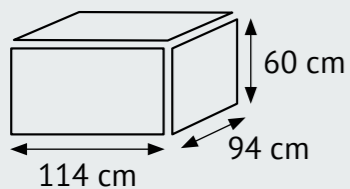


The measures of the box may vary


### DIRECTION OF ASCENT

Clockwise

Counter clockwise



### TURN POSITION

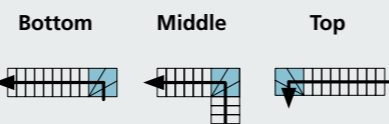

## MEASUREMENTS valid for all the configurations


The **SYSTEM FOR ADJUSTING THE HEIGHT BETWEEN THE STEPS (RISE)** allows you to:

- Obtain different heights between floors with the same number of steps.
- Obtain the height between the floors as required with more or fewer steps (this means you can find the best compromise between the step height and the space occupied by the staircase).

NUMBER OF STEPS	HEIGHT BETWEEN FLOORS (H)
10 steps 1 box	Min. 204 cm Max. 244 cm (Max. 264 cm)
11 steps 1 box	Min. 223 cm Max. 266 cm (Max. 288 cm)
12 steps 1 box	Min. 241 cm Max. 289 cm (Max. 313 cm)
13 steps 1 box + 1 extra step	Min. 260 cm Max. 311 cm (Max. 337 cm)
14 steps 1 box + 2 extra steps	Min. 278 cm Max. 334 cm (Max. 362 cm)
15 steps 1 box + 3 extra steps	Min. 297 cm Max. 356 cm (Max. 386 cm)
16 steps 1 box + 4 extra steps	Min. 315 cm Max. 379 cm (Max. 411 cm)

Add more steps to reach greater heights.

- H = Finished floor to finished floor height.
- Top step fixed one rise below finished upper floor.
- Ceiling opening width: staircase width + 5 cm.

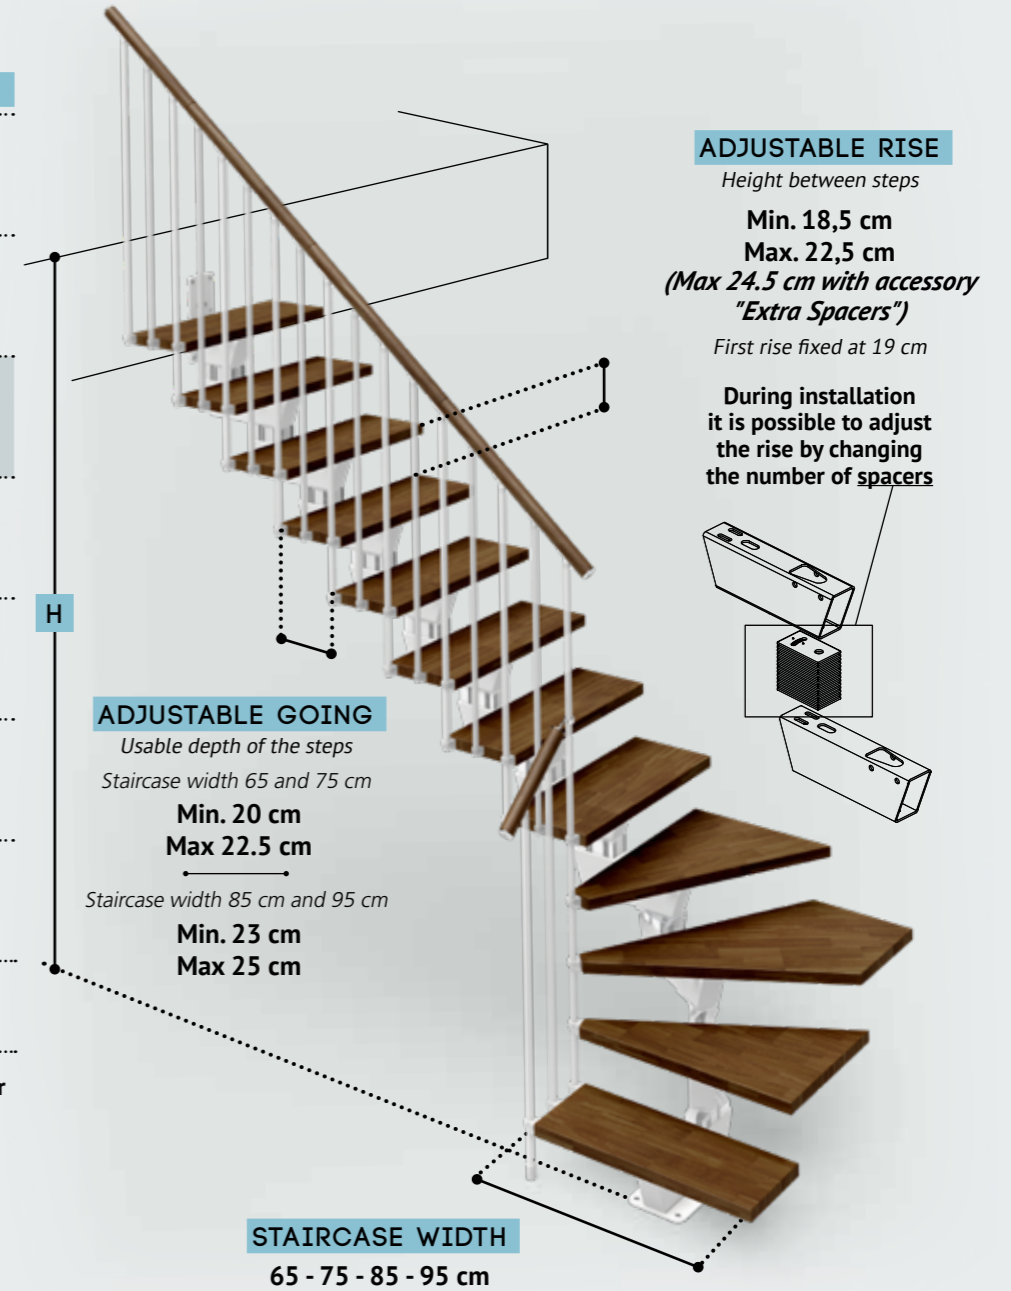

### ADJUSTABLE RISE

Height between steps

Min. 18,5 cm  
Max. 22,5 cm

(Max 24.5 cm with accessory "Extra Spacers")

First rise fixed at 19 cm

During installation it is possible to adjust the rise by changing the number of spacers

### ADJUSTABLE GOING

Usable depth of the steps

Staircase width 65 and 75 cm

Min. 20 cm  
Max 22.5 cm

Staircase width 85 cm and 95 cm

Min. 23 cm  
Max 25 cm

### STAIRCASE WIDTH

65 - 75 - 85 - 95 cm

### ACCESSORIES

Extra step (with structure and railing).	Railing for 3 steps (External side).	Balustrade for upper floor (100 cm).	Lateral support.	Safety bars under step.	Extra spacers (to reach a max rise of 24,5 cm).	LED lighting between the steps.